

**Description**


Extruded aluminium joint covers used to cover exterior and interior joints on finished walls and ceilings, with no visible fixings.

**Materials**


Anodized aluminium 6063/T6  
Also available in mill finish / powder coated.

**Supply Lengths**

3m, other widths (B) available with pre-formed aluminium plates.

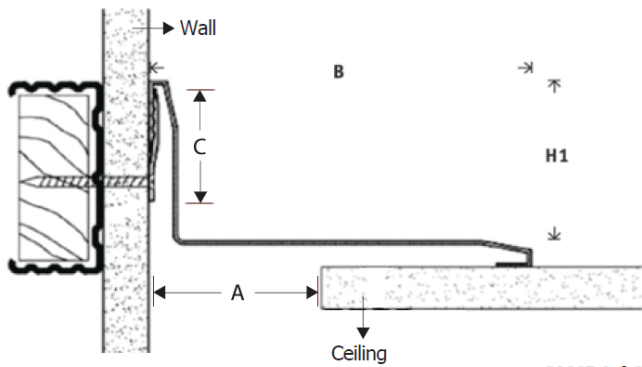

**CWJ1/C**  
wall corner/ceiling corner support

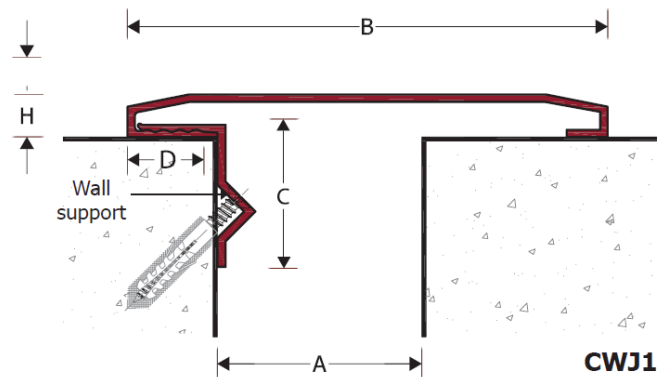

**CWJ1**  
with wall/ceiling support

TYPE	A	B	C	D	H	H1	Total Movement
<b>Flat Profile</b>							
CWJ1 50	50	117	35	22	10.5	-	84 (+43 -41)
CWJ1 75	75	117	35	22	10.5	-	84 (+18 -66)
CWJ1 100	100	167	35	22	10.5	-	134 (+43 -91)
CWJ1 125	120	219	35	22	10.5	-	186 (+70 -116)
CWJ1 150	150	219	35	22	10.5	-	186 (+45 -141)
<b>Corner Profile</b>							
CWJ1/C 50	50	95	45	-	10.5	50	95 (-50 +45)
CWJ1/C 75	75	95	45	-	10.5	50	95 (-75 +20)
CWJ1/C 100	100	160	45	-	10.5	50	160 (-100 +60)
CWJ1/C 125	120	205	45	-	10.5	50	205 (-125 +80)
CWJ1/C 150	150	205	45	-	10.5	50	205 (-150 +55)

Dimension in mm